
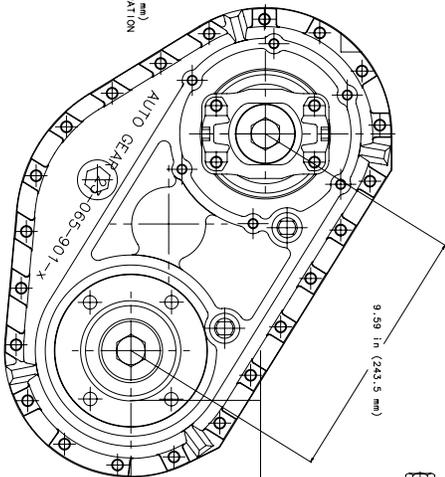


RATIO OPTIONS:
 UNDERDRIVES TO 2.704:1 LOW
 OVERDRIVES TO 0.764:1 HIGH


SHAFT ENDS (STANDARD):
 34 SPLINE 1.75 DIAMETER (20/40 DP 37.5 PA)
 YOKES AND FLANGES TO SPICER 1510 SERIES

OPTIONAL * DIRECT MOUNT DESIGNS
 SUPPORT ALL COMMON LIGHT TRUCK
 GEOMETRIES

OPTIONAL RIGHT OR LEFT HAND LOWER AXIS
 OPTIONAL FRONT OR REAR SHIFTING

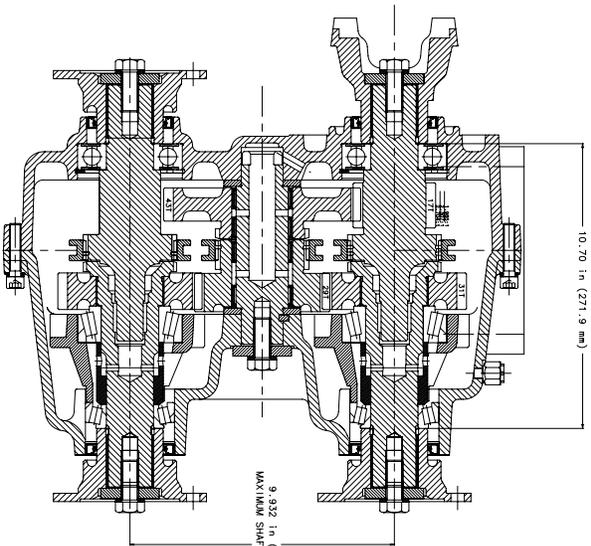

OPTIONAL DUAL OFFSIDE OUTPUTS ENABLE
 ECONOMICAL TAG AXLE 6X6 CHASSIS

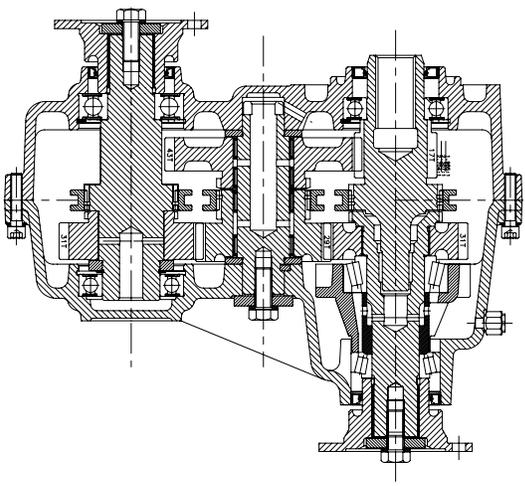

HIGH OUTPUT?
 LOW OUTPUT?
 BOTH?
 WHATEVER.
 WE'VE GOT YOU COVERED.

MODEL 23
 BASIC TWO-SPEED
 TRANSFER CASE

DESIGNED FOR VEHICULAR USE WITH INTERNAL COMBUSTION
 ENGINES AND AXLE LOADINGS TO 10,000 POUNDS (4550 KG).
 CONTACT US FOR YOUR DUTY-CYCLE RATING.

*AVAILABILITY OF OPTIONAL FEATURES MAY DEPEND
 UPON PURCHASE OF TOOLING, PRODUCTION VOLUME
 COMMITMENTS AND EXTENDED LEADTIMES.

SPICER TRANSFER CASE MODEL 23 PART NUMBER 23-000-xxx-A 23-000-xxx-A

MODEL 23-000-xxx-A
